


# BLEACHED SULPHATE BEECH WOOD PULP



Technical parameters - ST			
Parameter	Standard	Unit	Value
Breaking length (PFI mill) 30°SR	STN ISO 5270	km	min 7
Brightness	STN ISO 3688	% ISO	min 88
Dryness	STN 500207	%	min 83
Dirt content	SP-VK-14/98BKC		max 40
pH	STN ISO 6588		5,0 - 7,5
Ash	STN ISO 1762	%	0.4
Content of "OX"	PTS-RH 012/90	mg/kg	< 150

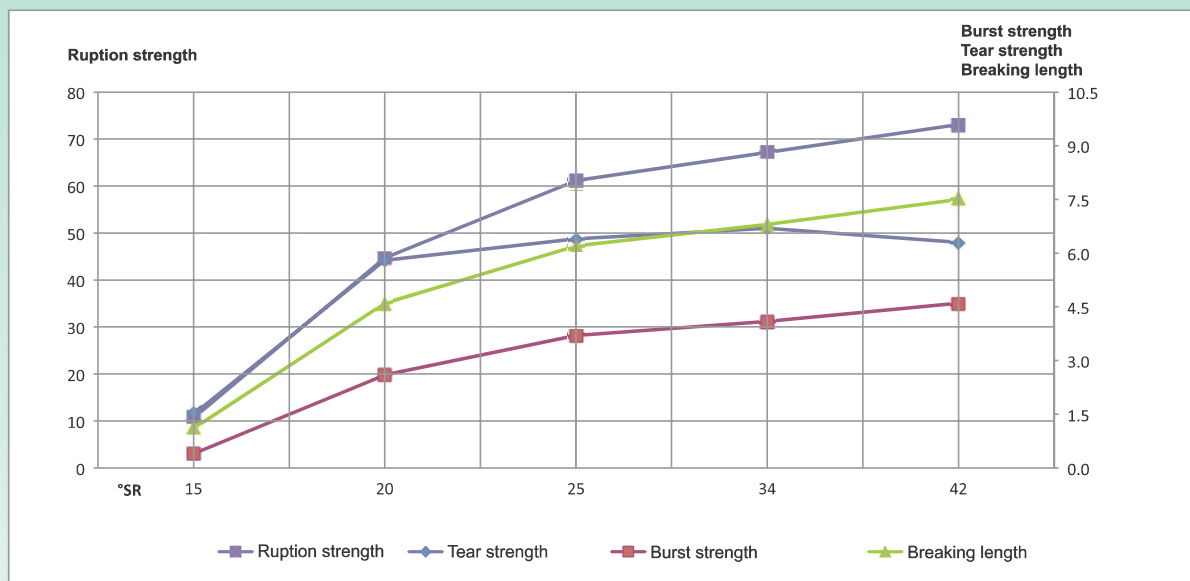

## Physical and mechanical properties

Parameter	Standard	Unit	Value				
			0	1000	2000	3000	4000
PFI Mill rotation	STN EN ISO 5264-2		0	1000	2000	3000	4000
Grinding degree °SR	STN EN ISO 5267-1	°SR	15	20	25	34	42
Ruption strength	STN EN ISO 1924-1	N.m/g	10.63	44.66	61.14	67.14	73.10
Breaking length	STN EN ISO 1924-1	km	1.1	4.6	6.2	6.8	7.5
Burst strength	STN EN ISO 2758	kPa.m/g	0.4	2.6	3.7	4.1	4.6
Tear strength	STN ISO 1974	mN.m²/g	1.5	5.8	6.4	6.7	6.3
Basic weight	STN EN ISO 536	g/m²	79.23	78.92	79.12	79.01	79.05

## Packaging parameters

Pulp sheets with dimension 600 x 800 mm are shelved and compressed into bales. The bale width is approx. 500 mm and a weight 200 kg weighted on certified scale. Bales are delivered in blocks called "Unit" wired with galvanized wire. The one Unit consists of 6 bales with weight of 1200 kg.



## BUKÓZA Export-Import, a.s.

Hencovská 2073  
093 02 Hencovce  
Slovakia  
Tel.: +421 57 441 3062/3039/3008  
Fax: +421 57 441 2559  
E-mail: [exim@bukozas.sk](mailto:exim@bukozas.sk)  
[www.bukozas.sk](http://www.bukozas.sk)



"Opýtajte sa na FSC resp. PEFC certifikované produkty" / "Look for FSC certified products"



Značka zodpovedného obhospodarovania lesov



Podporuje trvalo udržateľné obhospodarovanie lesov